
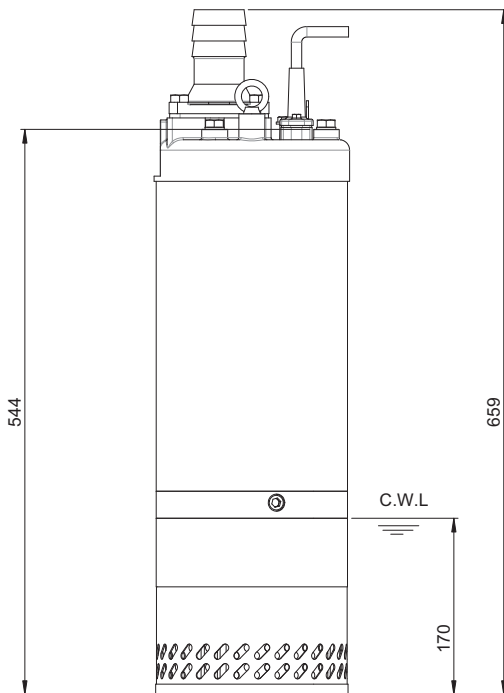


Shaft Speed : 2850 rpm

Outlet : 50mm, 2in

| OUTPUT | HEAD | FLOW |
|--------|-------------------|-------------------------|
| 3 kW | Rated : 30m, 98ft | Rated : 3.3 l/s, 53 gpm |
| 4 HP | Max : 35m, 115ft | Max : 8.3 l/s, 132 gpm |



Weight : 45kg / 99lbs

| | | |
|-------------------------|--|--------------------------|
| Pump Type | Electric Submersible Pumps | |
| | Three Phase | |
| | IP 68 | |
| Motor | Type | Induction Motor |
| | Poles | 2 Pole |
| | Insulation | Class F |
| | Protector | Circle Thermal Protector |
| | Starter Method | D.O.L. |
| Lubricant | Food Grade (ISO VG32) | |
| Impeller Type | Closed • Dual impellers | |
| Shaft Seal | Double Mechanical Seal | |
| | Silicon Carbide VS Ceramic / Carbon | |
| Bearings | C3 Shielded ball bearings | |
| Cable | H07BQF | |
| | Length: 20m (66ft) or longer upon request. | |
| Materials | Pump Casing | Gray Iron |
| | Impeller | Chromium Iron |
| | Motor Frame | Stainless Steel |
| | Motor Shaft | Stainless Steel |
| | Strainer | Stainless Steel |
| Outer Cover | Stainless Steel | |
| Max. Liquid Temperature | 40°C (104°F) | |
| Max. Submersion Depth | 20m (66ft) | |
| pH Range | 5-8 | |